


CURVED SERIES

AR400, AR401, AR402

Rollashield®
PREMIUM ROLLER SHUTTERS by **OZROLL**



SLAT PROFILES



FEATURES & BENEFITS

- Insulation
- Added security
- Wide range of colours
- Minimum roll up size
- Style choices
- Reduced greenhouse emissions
- Protection from the elements
- Light control
- Sound dampening

TECHNICAL SPECIFICATIONS

Weight (per m ²)	4kg
Maximum Curtain Width	3.6m
Maximum Area (m ²)	8.0
Gauge of Aluminium	0.32mm
Profile Slat Height	40mm
Profile Slat Thickness	9mm
Standard Guide Dimensions	53mm
Standard Bottom Bar Dimensions	50mm
Standard Axle	50mm circular

The Rollashield Residential Curved Series profiles have been designed specifically to suit the domestic roller shutter market in Australia but are also ideal with many commercial applications. The slat is roll formed in our Adelaide manufacturing facility to the highest of world standards using German built roll forming machines which are the most advanced of their type in the world.

The Rollashield Residential Curved Series slat is a double walled cavity with PU foam injected during the roll forming process. This process provides economical strength and insulation qualities while maintaining exceptional working performance of the slat. The curved shape of the slat provides optimal lateral strength and minimal roll sizes, offering a much smaller head box size.


The Rollashield curved series is available in three different styles, the 400 with profile lines on the convex side and a smooth finish on the concave, the 401 with a smooth finish on both sides and the 402 with profile lines on both sides.

Ozroll's slat profiles can reduce private heating and cooling costs by 40%


Based on tests using National Housing Energy Rating Software

BOX COLOUR OPTIONS

Full colour options are only available for 165mm - 205mm.
Please see page 3 to confirm colours for 150mm & 230mm sizes.

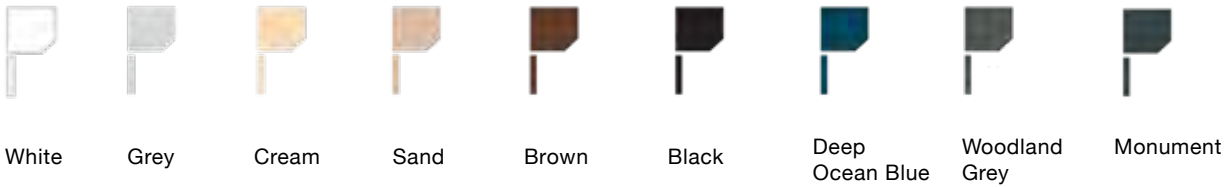

ROLLER SHUTTER COLOUR

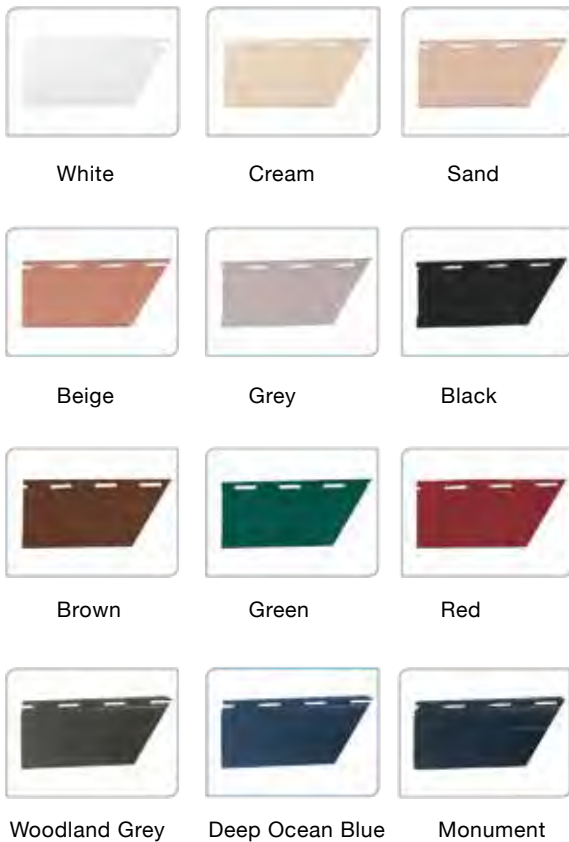

CONTROL OPTIONS

MANUAL



MOTORISED



Please note: Colours displayed are a guide only and have been matched as closely as possible. Due to the nature of the printing process, some degree of colour variation may occur. We recommend that you use production line prepared samples for final colour selection or approval.

SQUARE BOXING (SQ45)

Sizes Available Maximum Overall Height

150mm	1300mm
165mm	1700mm
180mm	2135mm
205mm	3000mm
230mm	3800mm

Please note: Only when using Ozroll's 50mm circular axle.

CYCLONESAFE™

CYCLONE RATED ROLLER SHUTTER

CYCLONE RATED

TESTED BY JAMES COOK UNIVERSITY

CYCLONE RATED UP TO C4

MEETS RELEVANT CYCLONE STANDARDS



PROTECT YOUR HOME! PROTECT YOUR FAMILY!

CycloneSafe™
Roller Shutters

CYCLONESAFE™ ROLLER SHUTTERS CONTROL OPTIONS

With the recent increase in extreme weather and storm conditions across Australia, many Australian home owners and businesses are looking for a better solution for cyclone and storm protection.

It is for this reason that CW Products, (Australia's leading supplier of roller shutters and home automation products) has developed the **CycloneSafe™ Roller Shutter**.


CycloneSafe™ has a Cyclone Rating up to C4 and is compliant with AS/NZS1170.2:2011, which means it can be used in Australian Cyclone Regions including C4 (at a width of 1500mm).

At CW Products we're committed to helping protect Australian families and their homes!




CYCLONESAFE™ BENEFITS

- Cyclone rated in Australian Cyclone Regions up to C4.
- Tested by James Cook University.
- Complies with AS/NZS1170.2:2011 all relevant wind & cyclone standards.
- Commercial grade double wall extruded shutter profile.
- Heavy duty 68mm cyclone guide with locking system.
- Heavy duty steel axle and internal sealed bearings.
- Roll-tight design.
- Suitable for windows up to 2700mm wide (2400mm in NT).
- Suitable for roller doors up to 3000mm wide (2400mm in NT).
- High quality powder coated finish.
- Choice of profile colours.
- Either manual or motorised operation.
- Compatible with SolarSmart™ Plus & PowerSmart™.
- CycloneSafe™ Authentication Plate fitted.
- Made in Australia.

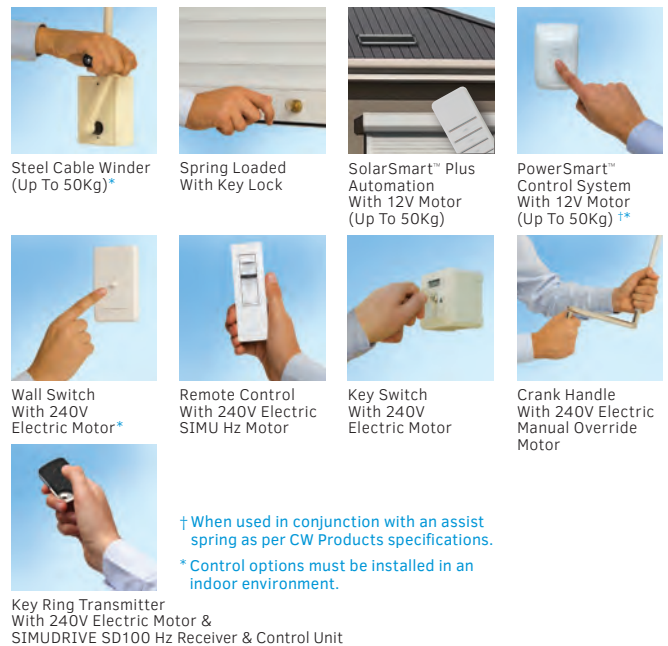

PROFILE COLOUR OPTIONS

Select from our wide range of high quality 36mm Extruded roller shutter profile colours.

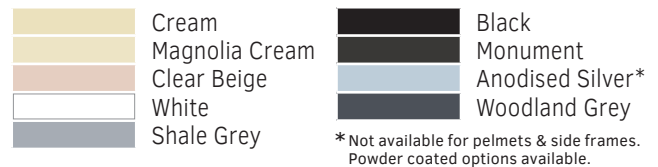

TECHNICAL SPECIFICATIONS

Cyclone Rating	Up To C4
Max Window Shutter Width	Up To 2700mm (2400mm in NT)
Max Roller Door Width	Up To 3000mm (2400mm in NT)
Max Shutter Height	Up To 3000mm
Profile Slat Covering	36mm
Profile Slat Thickness	9.7mm
Axle Types	Octagonal Steel
Bottom Bar Dimensions	55mm x 8.5mm
Guide Dimensions	68mm x 22mm (Heavy Duty Cyclone Guide)
Paint Finish	High Quality Powder Coat

For more information on CycloneSafe™ Roller Shutters, please contact your nearest dealer, installer or visit www.cwproducts.com.au

Authorised Dealer:



Exclusively distributed in Australia by **CW Products** Tel: +61 8 8341 0120 Web: www.cwproducts.com.au

Illustrations, photos and colours shown in this brochure are for illustrative purposes only. All technical specifications and dimensions are correct at time of printing and may change without notice. For more information please contact your CW Products representative. CycloneSafe and the CycloneSafe logo are trademarks of CW Products. © 2023 CW Products.

FIRESAFE™

BUSHFIRE RATED ROLLER SHUTTER

BUSHFIRE RATED



TESTED BY CSIRO

BUSHFIRE RATED TO BAL A40

MEETS AUS BUSHFIRE STANDARDS

PROTECT YOUR HOME! PROTECT YOUR FAMILY!



FIRESAFE™ ROLLER SHUTTERS

As more Australians move to country and semi-rural areas for a better lifestyle, and our urban sprawl takes homeowners closer to bushfire prone areas, protection from bushfires has become increasingly important in Australia.

It is for this reason that CW Products, (Australia's leading supplier of roller shutters and home automation products) has developed the **FireSafe™ Bushfire Rated Roller Shutter**.

FireSafe™ is bushfire rated to Bushfire Attack Level (BAL) A40 and is compliant with Australian Bushfire Construction Standard AS3959-2018 (Clauses 3.7 & 8.5.1).

At CW Products we're committed to helping protect Australian families and their homes!



FIRESAFE™ BENEFITS

- Bushfire rated to Bushfire Attack Level (BAL) A40.
- Tested by CSIRO (Report# FSZ1379).
- Complies with Australian Bushfire Construction Standard AS3959-2018 (Clauses 3.7 & 8.5.1).
- Radiant heat shielding properties to 40 kW/m².
- Commercial grade double wall extruded shutter profile for heavy duty strength and extreme heat protection.
- Heavy duty 68mm guide system for extra strength.
- Heavy duty steel axle and internal sealed bearings.
- Roll-tight design.
- Suitable for widespan widths up to 5800mm.
- High quality powder coated finish.
- Choice of profile colours.
- Either manual or motorised operation.
- FireSafe™ Authentication Plate fitted.
- Made in Australia.

CONTROL OPTIONS



Steel Cable Winder (Up To 50Kg)*



Spring Loaded With Key Lock



Crank Handle With Gear Ace (Up To 30Kg)



PowerSmart™ Control System With 12V Motor (Up To 50Kg)†*



Wall Switch With 240V Electric Manual Override Motor*



Remote Control With 240V Electric SIMU Hz Manual Override Motor



Crank Handle With 240V Electric Manual Override Motor

† When used in conjunction with an assist spring as per CW Products specifications.

* Control options must be installed in an indoor environment.

PROFILE COLOUR OPTIONS

Select from our wide range of high quality 36mm Extruded roller shutter profile colours.

	Cream		Black
	Magnolia Cream		Monument
	Clear Beige		Anodised Silver*
	White		Woodland Grey
	Shale Grey		

* Not available for pelmets & side frames. Powder coated options available.

TECHNICAL SPECIFICATIONS

Bushfire Attack Level Rating	BAL A40
Maximum Shutter Width	5800mm
Maximum Shutter Height	3000mm
Profile Slat Covering	36mm
Profile Slat Thickness	9.7mm
Axle Types	Octagonal Steel
Bottom Bar Dimensions	55mm x 8.5mm
Guide Dimensions	68mm x 25mm/14mm (Heavy Duty Guide)
Paint Finish	High Quality Powder Coat

For more information on FireSafe™ Roller Shutters, please contact your nearest dealer, installer or visit www.cwproducts.com.au!

Authorised Dealer:



BUSHFIRE
RATED
ROLLER
SHUTTERS



Exclusively distributed in Australia by **CW Products** Tel: +61 8 8341 0120 Web: www.cwproducts.com.au

Illustrations, photos and colours shown in this brochure are for illustrative purposes only. All technical specifications and dimensions are correct at time of printing and may change without notice. For more information please contact your CW Products representative. FireSafe and the FireSafe logo are trademarks of CW Products. © 2023 CW Products.